


Cod produs	MW-EN13162-T5-DS(70,90)-CS(10)30-TR10-PL(5)300-MU1-AW0,75-WL(P)-WS
Certificat	034-02-CPR-2018-11-19
Produs in concordanta cu	EN13162
Descriere produs	Placi din vata minerala bazaltica pentru izolare termica si fonica
Zona de aplicare	Izolare termica pentru acoperisuri plate, in strat dublu. Partitii, Fatade



FATADA

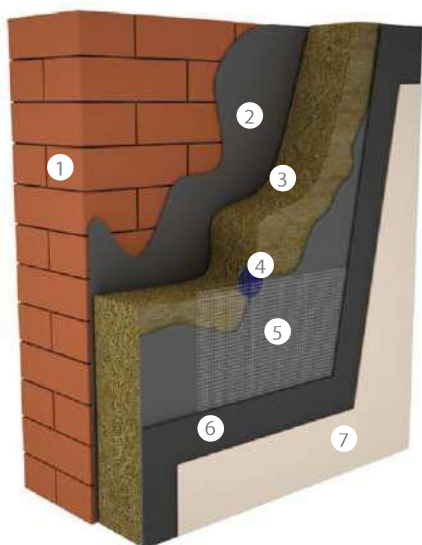

1. Perete
2. Adeziv
3. IZOVAT 100
4. Dibluri pentru fixare
5. Plasa din fibra de sticla
6. Etansare
7. Strat decorativ si protector

SPECIFICATII TEHNICE

Rezistenta la compresiune, CS(10)	30 kPa
Rezistenta la tractiune perpendiculara	10 kPa
Absorbtiia apei pe termen scurt, WS	$\leq 1 \text{ kg/m}^2$
Absorbtiia apei pe termen lung, WL	$\leq 3 \text{ kg/m}^2$
Reactia la foc	A1
Densitate	100 kg/m^3
Conductivitate termica	$0.035 \text{ W}\cdot\text{m}^{-1}\cdot\text{K}^{-1}$
Toleranta grosime	T5
Dimensiune placi	1000x600x30...240 mm

